


Item	Description
1	Ripper Tip/Shank Protector
2	Carriage Pin/Tool Bar Pin
3	Tool Bar Link
4	Lift Cylinder Pin
5	Tool Bar Link
6	Frame End Angle Cylinder
7	Rod End Angle Cylinder

SAFETY FIRST

1. Wear Safety Equipment.
2. Keep hands and feet clear.
3. Beware of flying objects.

Prior to removing any pins or parts refer to Manufacturers Service manual for proper procedures for securing and stabilizing equipment.

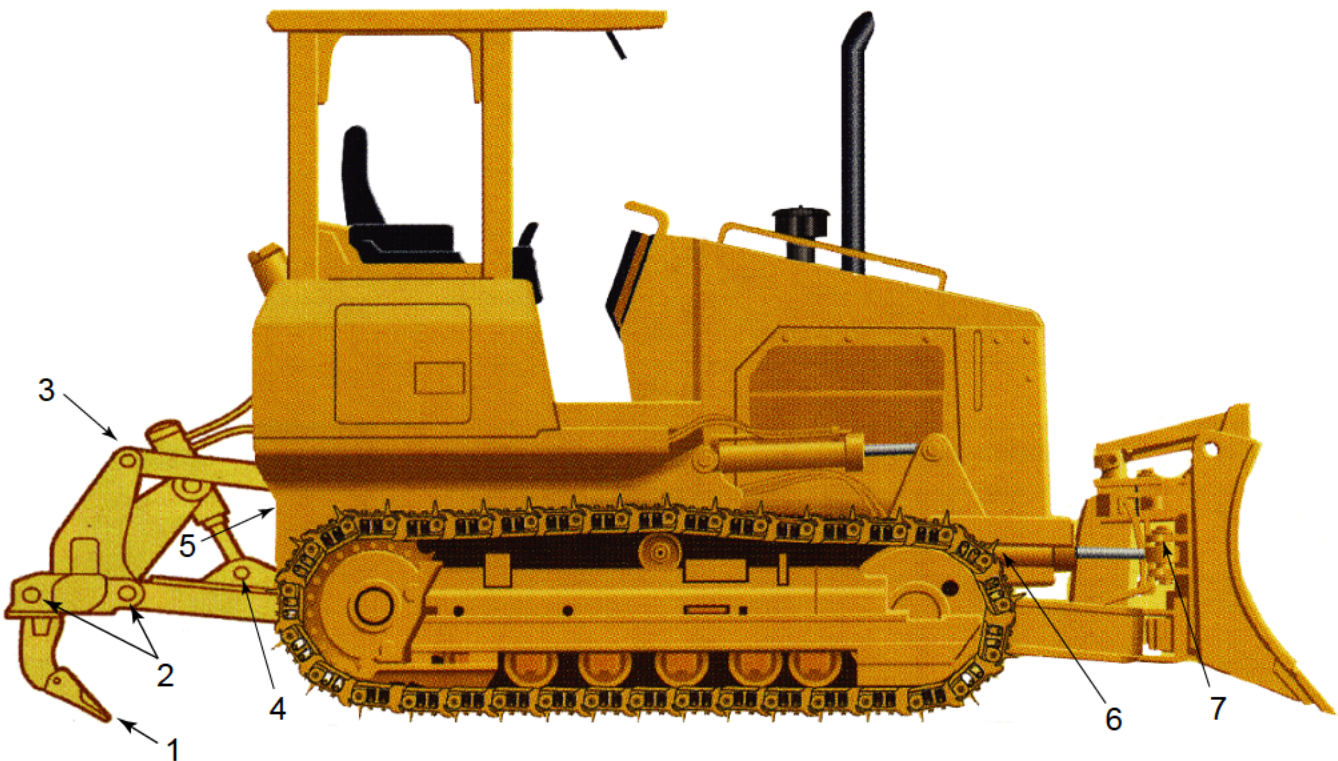

See back for Pin Removal / Insertion specifications and recommended Slide Sledge® tool kit.

The following removal and insertion tips are manufacturer recommendations for this model. Other model track-type tractors may use similar tips and tools for similar removals. Consult with manufacturer for specific models and uses.

Item	Tool/Tip	Description	Part#
#1	R/I Tool	9 lb./30" Slide Sledge	25050
	R/I Tip	3/8" Bucket Tooth Remover	25300
	R/I Tip	3/8" Bucket Tooth Inserter	25310
#2	R/I Tool	9 lb./30" Slide Sledge	25050
	R/I Tip	7/8" Pin Driver	25225
#3	R/I Tool	9 lb./30" Slide Sledge	25050
	R/I Tip	7/8" Pin Driver	25225
#4	R/I Tool	9 lb./30" Slide Sledge	25050
	R/I Tip	7/8" Pin Driver	25225
#5	R/I Tool	9 lb./30" Slide Sledge	25050
	R/I Tip	7/8" Pin Driver	25225
#6	R/I Tool	9 lb./30" Slide Sledge	25050
	R/I Tip	1 1/4" Pin Driver	25290
#7	R/I Tool	9 lb./30" Slide Sledge	25050
	R/I Tip	1 1/4" Pin Driver	25290

Recommended Tool Kit for D3-5 Track-Type Tractor

Product	Part#
9 lb./30" Slide Sledge	25050
3/8" Bucket Tooth Remover	25300
3/8" Bucket Tooth Inserter	25310
7/8" Pin Driver	25225
1 1/4" Pin Driver	25290
5 lb. Handle Weight	1001001

Removal and installation should only be performed on pins that have been properly serviced and maintained.